


SEC 02 2 MIL CLEAR SAFETY FILM

PROTECTION

- Accidental Breakage
- Earthquakes
- Windstorms
- Vandalism

CONSTRUCTION

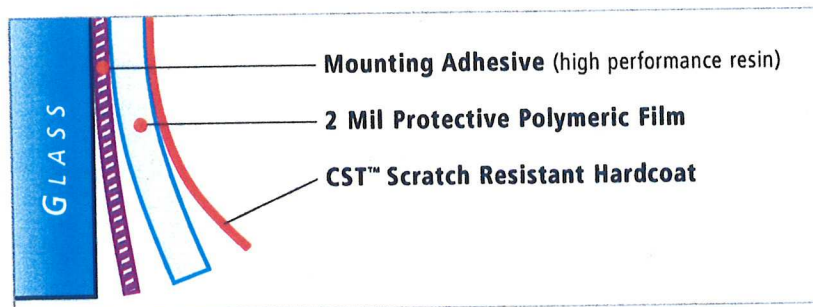

SECURITY SPECIFICATIONS & TESTS

Visible Light Transmission	86%
UV Light Reduction	98%
ASTM D882 Break Strength	50 pli
ASTM D3330 Peel Strength	> 5 lbs/inch
ASTM D2582 Average Puncture Strength	> 30 lbs
ASTM D1044 Percent Haze Change	< 4.4%

ASTM E84-98 Surface Burning Tests		
Smoke Density		20
Flame Spread Rating=5	NFPA Class A	• UBC Class 1
Time To Ignite (seconds)		205
Flame Front (max. feet)		1
Rate Of Burning (inches/seconds)		0.1

SEC 02 - 2 Mil Clear

PROTECTIVE POLYMERIC GLASS COATINGS DESIGNED FOR GLASS HAZARD MITIGATION