


SEC 04 4 MIL CLEAR SAFETY FILM

PROTECTION

- Accidental Breakage
- Earthquakes
- Windstorms
- Vandalism

CONSTRUCTION

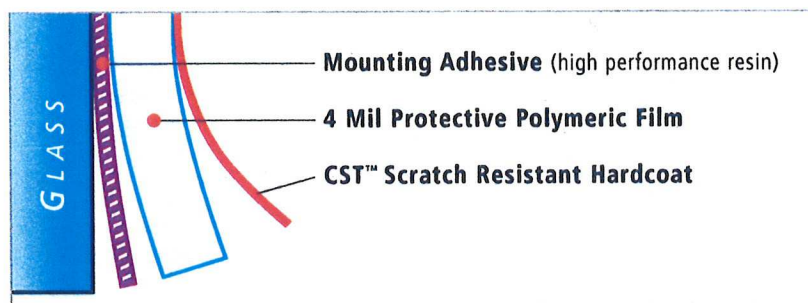

SECURITY SPECIFICATIONS & TESTS

Visible Light Transmission	87%
UV Light Reduction	98%
ASTM D882 Break Strength	100 pli
ASTM D3330 Peel Strength	> 5 lbs/inch
ASTM D2582 Average Puncture Strength	> 65 lbs
ASTM D1044 Percent Haze Change	< 4.4%

IMPACT	ANSI Z97.1-2004 Test	Class B
	16 CFR 1201 US Govt. Standard Test	CAT I
	BS 6206:1981	Class A
	EN12600 Pendulum Test	Class 2B
COMBUSTION	ASTM E84-98 Surface Burning Tests	
	Smoke Density	20
	Flame Spread Rating=5	NFPA Class A • UBC Class 1
	Time To Ignite (seconds)	205
	Flame Front (max. feet)	1
	Rate Of Burning (inches/seconds)	0.1

SEC 04 ■ 4 Mil Clear



PROFESSIONAL ANTI-FRAGMENTATION FILMS DESIGNED FOR GLASS HAZARD MITIGATION